

A

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
PATENT APPLICATION TRANSMITTAL LETTER

Applicants: Marc Ira Lipton
Robert Derrick Gourdine
Filed: August 26, 1999
Attorney Docket No.: A00404-1
For: TELEPHONE TERMINAL APPARATUS AND METHOD

1c549 U.S. PTO
09/383775
08/26/99

Assistant Commissioner for Patents
Washington, D.C. 20231

This is a request for filing a Continuation application under 37 CFR 1.53(b) of application Serial Number 09/062,428 filed April 17, 1998, entitled "Telephone Terminal Apparatus and Method"

Enclosed are

- ☒ 39 pages specification, 1 page Abstract, and 4 sheets of drawings
☒ The prior application is assigned of record to Ameritech Corporation.
☒ Copy of Declaration combined with Power of Attorney.
☒ Amend the specification by inserting before the first line the sentence: "This application is a continuation of U.S. application Serial Number 09/062,428, filed April 17, 1998, which application is hereby incorporated by reference herein."
☒ Preliminary Amendment (7 pages)
☐ Information Disclosure Statement with copies of references

For	Number Filed	Number Extra	Rate	Basic Fee \$760.00
Total Claims	17	0 x	\$18.00	00.00
Independent Claims	11 =	8 x	\$78.00	624.00
TOTAL FILING FEE				\$1,384.00

☒

- ☒

By:

Bruce Stuckman
Ameritech Corp.
2000 W. Ameritech Center Drive
Loc. 4H80
Hoffman Estates, IL 60196
August 26, 1999

Bruce E. Stuckman
Attorney for Applicants
Registration No. 36,693
Phone: (847) 248-8816
Fax: (847) 248-6019

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Marc I. Lipton et al.

ATTORNEY DOCKET: A00404-1

FOR: TELEPHONE TERMINAL APPARATUS AND TERMINAL

Box New Patent Application
Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

Certificate of Express Mailing

I hereby certify that a Patent Application, including 39 pages specification, 1 page abstract and 4 sheets of drawings, 7 pages preliminary amendment and a copy of Declaration combined with Power of Attorney, is being deposited with the United States Postal Service as EXPRESS MAIL, POST OFFICE TO ADDRESSEE, Postage Prepaid, in an envelope addressed to:

Box New Patent Application
Assistant Commissioner of Patents
Washington, D.C. 20231

Express Mail Label No.: EI450674496US

on August 26, 1999

8-26-99
(date)

Mary E McNeill
Mary E. McNeill

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Marc I. Lipton et al.
Docket No.: A00404-1
For: TELEPHONE TERMINAL APPARATUS AND METHOD

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Please enter the following preliminary amendment.

In the Specification:

Please amend the specification as follows.

After the title, please insert the following:

--Cross Reference to Related Application

The present application is a continuation of U.S. Application Serial No. 09/062,428, filed April 17, 1998, entitled "TELEPHONE TERMINAL APPARATUS AND METHOD". The disclosure of the aforementioned parent application is hereby incorporated by reference into the disclosure of the present application.--

In the Claims:

Please cancel claims 1 to 45 without prejudice or disclaimer. Please add the following new claims.

46. (New) A method comprising:
providing a telephone apparatus having a handset, a handset-receiving portion and a hands-free audio interface;
while the handset is received by the handset-receiving portion,
communicating audio input and audio output of a telephone call via the hands-free audio interface; and
in response to the handset being removed from the handset-receiving portion during the telephone call, muting the audio input and maintaining to communicate the audio output of the telephone call via the hands-free audio interface.

47. (New) The method of claim 44 further comprising:
in response to the handset being replaced to the handset-receiving portion during the telephone call, unmuting the audio input to the telephone call via the hands-free audio interface.

48. (New) A telephone apparatus comprising:
a handset;
a handset-receiving portion;
a sensor to sense if the handset is removed from the handset-receiving portion;
a hands-free audio interface; and
a telephone circuit responsive to the sensor to communicate audio input and audio output of a telephone call via the hands-free audio interface while the handset is received by the handset-receiving portion, and to mute the audio input and maintain communicating the audio output of the telephone call via the hands-free audio interface in response to the handset being removed from the handset-receiving portion during the telephone call.

49. (New) The telephone apparatus of claim 46 wherein the telephone circuit is to unmute the audio input to the telephone call via the hands-free audio interface in response to the handset being replaced to the handset-receiving portion during the telephone call.

50. (New) An article of manufacture comprising:

a computer-readable storage medium; and

computer-readable data stored by the computer-readable storage medium, the computer-readable data to direct a telephone apparatus having a handset, a handset-receiving portion and a hands-free audio interface to communicate audio input and audio output of a telephone call via the hands-free audio interface while the handset is received by the handset-receiving portion, and in response to the handset being removed from the handset-receiving portion during the telephone call, to mute the audio input and to maintain communicating the audio output of the telephone call via the hands-free audio interface.

51. (New) The article of manufacture of claim 48 wherein the computer-readable data is further to direct the telephone apparatus to unmute the audio input to the telephone call via the hands-free audio interface in response to the handset being replaced to the handset-receiving portion during the telephone call.

52. (New) A method comprising:

providing a telephone apparatus having a handset, a handset-receiving portion and a hands-free audio interface;

while the handset is removed from the handset-receiving portion, muting audio input and communicating audio output of a telephone call via the hands-free audio interface; and

in response to the handset being replaced to the handset-receiving portion during the telephone call, unmuting the audio input and maintaining to communicate the audio output of the telephone call via the hands-free audio interface.

53. (New) A telephone apparatus comprising:
a handset;
a handset-receiving portion;
a sensor to sense if the handset is received by the handset-receiving portion;
a hands-free audio interface; and
a telephone circuit responsive to the sensor to mute audio input and
communicate audio output of a telephone call via the hands-free audio interface
while the handset is removed from the handset-receiving portion, and to unmute the
audio input and maintain communicating the audio output of the telephone call via
the hands-free audio interface in response to the handset being replaced to the
handset-receiving portion during the telephone call.

54. (New) An article of manufacture comprising:
a computer-readable storage medium; and
computer-readable data stored by the computer-readable storage medium,
the computer-readable data to direct a telephone apparatus having a handset, a
handset-receiving portion and a hands-free audio interface to mute audio input and
communicate audio output of a telephone call via the hands-free audio interface
while the handset is removed from the handset-receiving portion, and to unmute the
audio input and to maintain communicating the audio output of the telephone call
via the hands-free audio interface in response to the handset being replaced to the
handset-receiving portion during the telephone call.

55. (New) A method comprising:
providing a telephone apparatus having a hook switch and a hands-free audio
interface;
while the hook switch is depressed, communicating audio input and audio
output of a telephone call via the hands-free audio interface; and
in response to the hook switch being released, muting the audio input and
maintaining to communicate the audio output of the telephone call via the hands-
free audio interface.

56. (New) The method of claim 53 further comprising:
subsequent to the hook switch being released, unmuting the audio input to the telephone call via the hands-free audio interface in response to the hook switch being depressed.

57. (New) A telephone apparatus comprising:
a hook switch;
a hands-free audio interface; and
a telephone circuit responsive to the hook switch to communicate audio input and audio output of a telephone call via the hands-free audio interface while the hook switch is depressed, and to mute the audio input and maintain communicating the audio output of the telephone call via the hands-free audio interface in response to the hook switch being released.

58. (New) The telephone apparatus of claim 55 wherein, subsequent to the hook switch being released, the telephone circuit is to unmute the audio input to the telephone call via the hands-free audio interface in response to the hook switch being depressed.

59. (New) An article of manufacture comprising:
a computer-readable storage medium; and
computer-readable data stored by the computer-readable storage medium, the computer-readable data to direct a telephone apparatus having a hook switch and a hands-free audio interface to communicate audio input and audio output of a telephone call via the hands-free audio interface while the hook switch is depressed, and in response to the hook switch being released, to mute the audio input and to maintain communicating the audio output of the telephone call via the hands-free audio interface.

60. (New) The article of manufacture of claim 57 wherein the computer-readable data is further to direct the telephone apparatus to unmute the audio input to the telephone call via the hands-free audio interface in response to the hook switch being depressed subsequent to the hook switch being released.

61. (New) A method comprising:
providing a telephone apparatus having a hook switch and a hands-free audio interface;
while the hook switch is released, muting audio input and communicating audio output of a telephone call via the hands-free audio interface; and
in response to the hook switch being depressed during the telephone call, unmuting the audio input and maintaining to communicate the audio output of the telephone call via the hands-free audio interface.

62. (New) A telephone apparatus comprising:
a hook switch;
a hands-free audio interface; and
a telephone circuit responsive to the hook switch to mute audio input and communicate audio output of a telephone call via the hands-free audio interface while the hook switch is released, and to unmute the audio input and maintain communicating the audio output of the telephone call via the hands-free audio interface in response to the hook switch being depressed.

63. (New) An article of manufacture comprising:
a computer-readable storage medium; and
computer-readable data stored by the computer-readable storage medium, the computer-readable data to direct a telephone apparatus having a hook switch and a hands-free audio interface to mute audio input and communicate audio output of a telephone call via the hands-free audio interface while the hook switch is released, and to unmute the audio input and to maintain communicating the audio output of the telephone call via the hands-free audio interface in response to the hook switch being depressed.

TELEPHONE TERMINAL APPARATUS AND METHOD

Technical Field

5 The present invention relates to telephone terminal apparatus and methods.

Background of the Invention

10 In many business situations, individuals are required to participate in conference calls with two or more other parties. Oftentimes, a significant time period of being a passive participant in a conference call is expended by an individual. In some cases, for
15 example, the active participation of the individual is not required at all in the conference call. In other cases, the individual is a passive participant for time periods in which other parties communicate in the conference call. At other times in either a conference
20 call or a two-party call, the individual is placed on-hold for a significant time period. During these time periods, the individual is limited in his/her ability to conduct additional business calls.

25 Brief Description of the Drawings

 The invention is pointed out with particularity in the appended claims. However, other features of the invention will become more apparent and the invention
30 will be best understood by referring to the following

detailed description in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram of an embodiment of a telephone terminal apparatus in accordance with the present invention;

FIG. 2 is a block diagram of an embodiment of the telephone circuit;

FIG. 3 is a flow chart of an embodiment of a first method in accordance with the present invention; and

FIG. 4 is a flow chart of an embodiment of a second method in accordance with the present invention.

Detailed Description of a Preferred Embodiment

Embodiments of the present invention provide an enhanced feature telephone set which allows an end user to simultaneously manage two separate telephone conversations with at least two separate parties. The apparatus allows an in-process, first telephone call to be placed in a passive, monitor mode so that a concurrent second telephone call can be placed. Using the apparatus, an end user can manage periods of being either on-hold or a passive participant in the first telephone call.

FIG. 1 is a block diagram of an embodiment of a telephone terminal apparatus in accordance with the present invention. The telephone terminal apparatus comprises a first audio input device 20, a first audio output device 22, a second audio input device 24, and a second audio output device 26. Each of the first audio

input device 20 and the second audio input device 24 comprises a microphone or a like transducer to generate electrical signals based upon audible acoustic pressure waves sensed thereby. Each of the first audio output
5 device 22 and the second audio output device 26 comprises a speaker or a like transducer to generate audible acoustic pressure waves based upon electrical signals applied thereto.

Preferably, the first audio input device 20 and
10 the first audio output device 22 provide a hands-free audio interface for the telephone terminal apparatus. In exemplary embodiments, the first audio input device 20 and the first audio output device 22 are utilized to provide a speakerphone audio interface for the
15 telephone terminal apparatus. As illustrated, the first audio input device 20 and the first audio output device 22 can be integrated or otherwise associated with a base set 30 of the telephone terminal apparatus. Alternatively, the first audio input device 20 and the
20 first audio output device 22 can be included in an attached speakerphone unit external to the base set 30.

It is preferred that the second audio input device 24 and the second audio output device 26 be integrated or otherwise associated with a handset 32 of the
25 telephone terminal apparatus. As alternatives to the handset 32, the second audio input device 24 and the second audio output device 26 can be associated with either a headset or another member which typically contacts an end user of the telephone terminal
30 apparatus.

A telephone circuit 34 selectively couples, uncouples, and modifies couplings between a plurality of telephone lines 36 and the first audio input device 20, the first audio output device 22, the second audio input device 24, and the second audio output device 26. The plurality of telephone lines 36 include at least a first telephone line 40 and a second telephone line 42. Preferably, the first telephone line 40 includes a first plain-old telephone service (POTS) line, and the second telephone line 42 includes a second POTS line. Although optional, it is also preferred that the second telephone line 42 include an on-demand line.

The telephone circuit 34 is coupled to the first telephone line 40 and the second telephone line 42 by an interface 44. The interface 44 can include one or more connectors to receive mating connectors associated with the first telephone line 40 and the second telephone line 42. For example, the interface 44 can include a pair of RJ11 jacks to receive a corresponding RJ11 plug from each of the telephone lines 40 and 42. Alternatively, the interface 44 can include a single RJ14 jack to receive a single RJ14 plug carrying both of the telephone lines 40 and 42.

The telephone circuit 34 is coupled to the second audio input device 24 and the second audio output device 26 by an interface 50 and an interface 52. The interface 50 is integrated or otherwise associated with the base set 30. The interface 52 is integrated or otherwise associated with the handset 32. The interfaces 50 and 52 can include wireline interfaces,

such as RJ11 interfaces, to couple a cable/wireline therebetween. Alternatively, the interfaces 50 and 52 can include wireless interfaces, such as radio frequency transceivers, to wirelessly communicate signals therebetween. In this case, for example, the handset 32 can communicate with the base set 30 as with a conventional cordless telephone.

The telephone circuit 34 is responsive to a hook switch 54 or like hook sensor, a user interface 56, and optionally, a user interface 58. As illustrated, the hook switch 54 can be actuated proximate to a handset-receiving portion 60 of the base set 30. Preferably, the handset-receiving portion 60 has the form of a cradle to receive and support the handset 32. Typically, although not necessary, the hook switch 54 is located at a portion of the cradle for supporting an ear end of the handset 32. When the handset 32 is supported by the handset-receiving portion 60, the hook switch 54 is depressed to indicate an on-hook condition. When the handset 32 is removed from the handset-receiving portion 60, the hook switch 54 is released to indicate an off-hook condition. As either an alternative to or in addition to being proximate to the handset-receiving portion 60, the hook switch 54 can include a key or a like control which is user-selectable.

Preferably, the user interface 56 includes a dialing interface such as a telephone keypad 62, audio control keys 64, and a speakerphone key 66. The user interface 58 can include any subset of the controls of

the user interface 56.

The telephone keypad 62 includes dialing digit keys of "0" to "9", a "*" key, and a "#" key.

Preferably, the telephone keypad 62 directs the

5 generation of dual-tone multi-frequency (DTMF) signals. Signals generated in response to the telephone keypad 62 are selectively applied to one of the first telephone line 40 and the second telephone line 42 by the telephone circuit 34.

10 The audio control keys 64 preferably includes volume controls to control the intensity of the audible signals generated by the first audio output device 22. The telephone circuit 34 can include a variable-gain amplifier whose gain is varied based upon the volume
15 controls. Typically, the volume controls include a first key to command an increased volume and a second key to command a decreased volume.

The speakerphone key 66 directs the telephone circuit 34 to initiate at least one speakerphone mode.
20 A first speakerphone mode can be initiated by depressing or otherwise selecting the speakerphone key 66 either: (i) prior to outdialing to the first telephone line 40 using the telephone keypad 62; or (ii) to answer an incoming call from the first
25 telephone line 40. In the first speakerphone mode, the telephone circuit 34: (i) couples the first audio input device 20 and the first audio output device 22 to the first telephone line 40; (ii) makes the first telephone line 40 responsive to the telephone keypad 62; (iii)
30 maintains the second audio input device 24 and the

second audio output device 26 to be substantially uncoupled from the first telephone line 40; (iv) maintains the second telephone line 42 to be substantially uncoupled with the audio input devices 20 and 24, the audio output devices 22 and 26, and the telephone keypad 62; (v) provides an off-hook condition with respect to the first telephone line 40; and (vi) provides an on-hook condition with respect to the second telephone line 42. By performing the aforementioned steps, an end user can communicate in a hands-free/speakerphone manner for a first call associated with the first telephone line 40.

From the first speakerphone mode, the telephone circuit 34 initiates a second speakerphone mode in response to receiving a signal from the hook switch 54. It is noted that the handset 32 is typically supported within the handset-receiving portion 60 when in the first speakerphone mode. In this case, the second speakerphone mode is initiated in response to removing the handset 32 from the handset-receiving portion 60 (which, in turn, releases the hook switch 54).

In the second speakerphone mode, the telephone circuit 34: (i) modifies the coupling between the first audio input device 20 and the first telephone line 40; (ii) couples the second audio input device 24 and the second audio output device 26 to the second telephone line 42; (iii) makes the second telephone line 42 responsive to the telephone keypad 62; (iv) maintains the off-hook condition with respect to the first telephone line 40; and (v) initiates an off-hook

condition with respect to the second telephone line 42. Preferably, the telephone circuit 34 modifies the coupling by either uncoupling, muting, or otherwise attenuating the coupling between the first audio input
5 device 20 and the first telephone line 40.

By performing the aforementioned steps, the first call is placed in a passive monitoring condition so that a concurrent outbound second call can be placed. In the passive monitoring condition, the end user can
10 continue to hear the audio from the first call using the first audio output device 22, but is inhibited from actively participating in the conversation. The audio volume of the conversation in the first call can be user-modified by use of the audio control keys 64. A
15 dial tone from the second telephone line 42 is provided and made audible by the second audio output device 26. The end user can proceed to out-dial using the telephone keypad 62 to initiate the second call with the second telephone line 42. The second audio input
20 device 24 and the second audio output device 26 provide the audio interface for the second call. Hence, the end user can simultaneously converse or otherwise conduct the second call while monitoring the first call.

25 When the second call is terminated by direct depression of the flash hook switch 54 or replacement of the handset 32 to the handset-receiving portion 60, the telephone circuit 34 returns to the first speakerphone mode. In particular, the telephone
30 circuit 34: (i) modifies the coupling between the first

audio input device 20 and the first telephone line 40;
(ii) makes the first telephone line 40 responsive to
the telephone keypad 62; and (iii) initiates an on-hook
condition with respect to the second telephone line 42.

- 5 Preferably, the telephone circuit 34 modifies the
coupling by either recoupling or unmuting the first
audio input device 20 with the first telephone line 40.
By performing the aforementioned steps, the first call
is returned to an active mode wherein the end user can
10 actively participate in the conversation using the
first audio input device 20.

The telephone circuit 34 is also capable of
providing a handset mode. The handset mode can be
initiated by removing the handset 32 from the handset-
15 receiving portion 60 (which, in turn, releases the hook
switch 54). The handset mode can be initiated either:
(i) prior to outdialing to the first telephone line 40
using the telephone keypad 62; or (ii) to answer an
incoming call from the first telephone line 40.

- 20 In the handset mode, the telephone circuit 34: (i)
couples the second audio input device 24 and the second
audio output device 26 to the first telephone line 40;
(ii) makes the first telephone line 40 responsive to
the telephone keypad 62; (iii) maintains the first
25 audio input device 20 and the first audio output device
22 to be substantially uncoupled from the first
telephone line 40; (iv) maintains the second telephone
line 42 to be substantially uncoupled with the audio
input devices 20 and 24, the audio output devices 22
30 and 26, and the telephone keypad 62; and (v) provides

an on-hook condition with respect to the second telephone line. By performing the aforementioned steps, an end user can communicate using the handset 32 for a first call associated with the first telephone line 40.

From the handset mode, the telephone circuit 34 initiates a third speakerphone mode in response to receiving a flash signal from the hook switch 54 (e.g. a quick depression and release of the hook switch 54) or receiving a signal from the speakerphone key 66. In the third speakerphone mode, the telephone circuit 34: (i) uncouples the second audio input device 24 and the second audio output device 26 from the first telephone line 40; (ii) couples the first audio output device 22 to the first telephone line 40; (iii) makes the second telephone line 42 responsive to the telephone keypad 62; (iv) maintains the off-hook condition with respect to the first telephone line 40; and (v) initiates an off-hook condition with respect to the second telephone line 42.

By performing the aforementioned steps, the first call is placed in a passive monitoring condition so that a concurrent outbound second call can be placed. In the passive monitoring condition, the end user can continue to hear the audio from the first call using the first audio output device 22, but is inhibited from actively participating in the conversation. The audio volume of the conversation in the first call can be user-modified by use of the audio control keys 64. A dial tone from the second telephone line 42 is provided

and made audible by the second audio output device 26. The end user can proceed to out-dial using the telephone keypad 62 to initiate the second call with the second telephone line 42. The second audio input device 24 and the second audio output device 26 provide the audio interface for the second call. Hence, the end user can simultaneously converse or otherwise conduct the second call while monitoring the first call.

When the second call is terminated by direct depression of the flash hook switch 54 or replacement of the handset 32 to the handset-receiving portion 60, the telephone circuit 34 returns to the first speakerphone mode. In particular, the telephone circuit 34: (i) modifies the coupling between the first audio input device 20 and the first telephone line 40; (ii) makes the first telephone line 40 responsive to the telephone keypad 62; and (iii) initiates an on-hook condition with respect to the second telephone line 42. Preferably, the telephone circuit 34 modifies the coupling by either coupling or unmuting the first audio input device 20 with the first telephone line 40. By performing the aforementioned steps, the first call is returned to an active mode wherein the end user can actively participate in the conversation using the first audio input device 20.

When the second call is terminated by a user-selection of the speakerphone key 66, the telephone circuit 34 returns to the handset mode. In particular, the telephone circuit 34: (i) uncouples the second

audio input device 24 and the second audio output device 26 from the second telephone line 42; (ii) couples the second audio input device 24 and the second audio output device 26 to the first telephone line 40; (iii) uncouples the first audio output device 22 from the first telephone line 40; (iv) makes the first telephone line 40 responsive to the telephone keypad 62; and (v) initiates an on-hook condition with respect to the second telephone line 42. By performing the aforementioned steps, the first call is returned to an active mode wherein the end user can actively participate in the conversation using the second audio input device 24.

Preferably, in each of the aforementioned modes, the telephone circuit 34 makes only one of the first audio input device 20 and the second audio input device 24 operational at a time.

FIG. 2 is a block diagram of an embodiment of the telephone circuit 34. To direct the various modes of operation, the telephone circuit 34 includes a logic circuit 100 such as microprocessor, a microcontroller, a programmable logic array, or an application-specific integrated circuit. The logic circuit 100 is responsive to the hook switch 54, the user interface 56, and the optional user interface 58 to determine and initiate the mode of operation.

The telephone circuit 34 includes a plurality of switching devices to selectively couple, uncouple, and modifying couplings between the audio input/output devices and the telephone lines. A switch 102

selectively couples and uncouples the first audio input device 20 to a transmit line 104 associated with the first telephone line 40. A switch 106 selectively couples and uncouples the first audio input device 20
5 to a transmit line 110 associated with the second telephone line 42. A switch 112 selectively couples and uncouples the first audio output device 22 to a receive line 114 associated with the first telephone line 40. A switch 116 selectively couples and
10 uncouples the first audio output device 22 to a receive line 120 associated with the second telephone line 42.

A switch 122 selectively couples and uncouples the second audio input device 24 to the transmit line 104 associated with the first telephone line 40. A switch
15 124 selectively couples and uncouples the second audio input device 24 to the transmit line 110 associated with the second telephone line 42. A switch 126 selectively couples and uncouples the second audio output device 26 to the receive line 114 associated
20 with the first telephone line 40. A switch 130 selectively couples and uncouples the second audio output device 26 to the receive line 120 associated with the second telephone line 42.

A switch 132 selectively couples and uncouples a
25 tone generator 134 to the transmit line 104 associated with the first telephone line 40. A switch 136 selectively couples and uncouples the tone generator 134 to the transmit line 110 associated with the second telephone line 42. The tone generator 134 is
30 responsive to the telephone keypad 62 to generate DTMF

signals.

A switch 140 selectively provides either an on-hook or off-hook condition for the first telephone line 40. A switch 142 selectively provides either an on-hook or off-hook condition for the second telephone line 42.

The aforementioned switches are responsive to the logic circuit 100. The switches can include solid state switching devices, mechanical relays, or other switching devices.

The first telephone line 40 is coupled to the transmit line 104 and the receive line 114 by a hybrid 150. The second telephone line 42 is coupled to the transmit line 110 and the receive line 120 by a hybrid 152. The hybrids 150 and 152 can include integrated hybrid circuits or transformers as is known in the art.

The first audio input device 20 and the first audio output device 22 are coupled to the switches 102, 106, 112, and 116 by a speakerphone circuit 154. The speakerphone circuit 154 amplifies signals received along either the receive line 114 or the receive line 120 for application to the first audio output device 22. The speakerphone circuit 154 is responsive to the audio control keys 64 to control the intensity or volume of audible signals generated by the first audio output device.

FIG. 3 is a flow chart of an embodiment of a first method in accordance with the present invention. As indicated by block 200, the method includes a step of providing a telephone apparatus having a first audio

input device, a second audio input device, a first audio output device, and a second audio output device. Preferably, this step includes providing a telephone apparatus described with reference to FIGS. 1 and 2, although an alternative telephone apparatus can be utilized.

As indicated by block 202, a step of coupling the first audio input device 20 and the first audio output device 22 to the first telephone line 40 is performed. Preferably, the logic circuit 100 closes the switch 102 to couple the first audio input device 20 to the transmit line 104 associated with the first telephone line 40, and closes the switch 112 to couple the first audio output device 22 to the receive line 114 associated with the first telephone line 40. The logic circuit 110 can further direct that the switch 132 be closed to couple the tone generator 134 to the transmit line 104. Additionally, it is preferred that the logic circuit 100 directs that the switches 106, 116, 122, 124, 126, 130, and 136 be open at this time.

As indicated by block 204, a step of providing a first call using the first audio input device 20 and the first audio output device 22 is performed. The first call is provided using the first speakerphone mode described with reference to FIG. 1. The first call is communicated via the first telephone line 40. Of particular advantage are cases in which the first call is a conference call with three or more participants including the end user.

As indicated by block 206, a step of receiving a

first signal is performed. Preferably, the first signal is based upon a signal generated by the hook switch 54 and received by the logic circuit 100. In this case, it is preferred that the first signal be
5 initiated in response to the handset 32 being removed from the handset-receiving portion 60. The end user can initiate the first signal, for example, when he/she is placed on hold in the first call, or when he/she is a passive participant in a conference call.

10 As indicated by block 210, a step of modifying the coupling between the first audio input device 20 and the first telephone line 40 is performed in response to receiving the first signal. Preferably, the logic circuit 100 opens the switch 102 to uncouple the first
15 audio input device 20 from the transmit line 104. Alternative approaches to muting the first audio input device 20 can be performed in this step. In general, however, the coupling is modified by attenuating the coupling between first audio input device 20 and the
20 first telephone line 40.

As indicated by block 212, a step of triggering a second, on-demand telephone line is performed in response to receiving the first signal. Preferably, the on-demand telephone line is provided by the second
25 telephone line 42. It is noted that triggering an on-demand line is optional since the second telephone line 42 need not be on-demand.

To enable out-dialing to the second telephone line 42, the logic circuit 100 closes the switch 136 to
30 couple the tone generator 134 to the transmit line 110

associated with the second telephone line 42. To inhibit out-dialing to the first telephone line 40, the logic circuit 100 opens the switch 132.

As indicated by block 214, a step of coupling the
5 second audio input device 24 and the second audio output device 26 to the second telephone line 42 is performed in response to receiving the first signal. Preferably, the logic circuit 100 closes the switch 124 to couple the second audio input device 24 to the
10 transmit line 110 associated with the second telephone line 42, and closes the switch 130 to couple the second audio output device 26 to the receive line 120 associated with the second telephone line 42.

As indicated by block 216, a step of providing a
15 dial tone from the second telephone line 42 is performed in response to the first signal. This step can include the logic circuit 100 directing the switch 142 to provide an off-hook condition for the second telephone line 42. As a result, the dial tone is
20 audible by the second audio output device 26.

As indicated by block 220, a step of receiving an out-dial signal is performed. The out-dial signal is received from the end user via the telephone keypad 62, a speed dialing control, or an alternative dialing
25 control. The out-dial signal is communicated to the second telephone line 42 to initiate a second call to be placed.

As indicated by block 222, a step of providing the second call using the second audio input device 24 and
30 the second audio output device 26 is performed. In

this step, audible signals sensed by the second audio input device 24 are communicated to the second telephone line 42. Further, the second audio output device 26 generates audible signals based upon signals
5 received from the second telephone line 42.

As indicated by block 224, a step of monitoring the first call using the first audio output device 22 is performed. The first call can be monitored by the end user while concurrently conducting the second call.
10 The end user may monitor the first call either to: (i) determine when he/she is no longer on hold; (ii) determine when he/she is to contribute in the first call; or (iii) monitor a conversation between other parties in the first call.

15 As indicated by block 226, a step of receiving a second signal is performed. Preferably, the second signal is based upon a signal generated by the hook switch 54 and received by the logic circuit 100. More preferably, the second signal indicates either a manual
20 depression of the hook switch 54 or replacement of the handset 32 to the handset-receiving portion 60.

As indicated by block 230, a step of terminating the second call is performed in response to receiving the second signal. Preferably, the logic circuit 100
25 directs the switch 142 to provide an on-hook condition for the second telephone line 42 in this step.

As indicated by block 232, a step of uncoupling the second audio input device 24 and the second audio output device 26 from the second telephone line 42 is
30 performed in response to receiving the second signal.

Preferably, the logic circuit 100 opens the switch 124 to uncouple the second audio input device 24 from the transmit line 110, and opens the switch 130 to uncouple the second audio output device 26 from the receive line 120.

As indicated by block 234, a step of modifying the coupling between the first audio input device 20 and the first telephone line 40 is performed in response to receiving the second signal. Preferably, the logic circuit 100 closes the switch 102 to recouple the first audio input device 20 to the transmit line 104. In general, however, the coupling is modified by unattenuating or unmuting the coupling between first audio input device 20 and the first telephone line 40.

As indicated by block 236, a step of returning to provide the first call using the first audio input device 20 and the first audio output device 22 is performed. In this step, audible signals sensed by the first audio input device 20 are communicated to the first telephone line 40. Further, the first audio output device 22 generates audible signals based upon signals received from the first telephone line 40.

FIG. 4 is a flow chart of an embodiment of a second method in accordance with the present invention. As indicated by block 300, the method includes a step of providing a telephone apparatus having a first audio output device, a second audio output device, a first audio input device, and a second audio input device. Preferably, this step includes providing a telephone apparatus described with reference to FIGS. 1 and 2,

although alternative telephone apparatus can be utilized. It is noted that a flow path for the second method can be performed using a telephone apparatus absent the first audio input device.

5 As indicated by block 302, a step of coupling the second audio input device 24 and the second audio output device 26 to the first telephone line 40 is performed. Preferably, the logic circuit 100 closes the switch 122 to couple the second audio input device
10 24 to the transmit line 104 associated with the first telephone line 40, and closes the switch 126 to couple the second audio output device 26 to the receive line 114 associated with the first telephone line 40. The logic circuit 110 can further direct that the switch
15 132 be closed to couple the tone generator 134 to the transmit line 104. Additionally, it is preferred that the logic circuit 100 directs that the switches 102, 106, 112, 116, 124, 130, and 136 be open at this time.

 As indicated by block 304, a step of providing a
20 first call using the second audio input device 24 and the second audio output device 26 is performed. The first call is provided using the handset mode described with reference to FIG. 1. The first call is
communicated via the first telephone line 40. Of
25 particular advantage are cases in which the first call is a conference call with three or more participants including the end user.

 As indicated by block 306, a step of receiving a first signal is performed. Preferably, the first
30 signal is based upon either a signal generated by the

hook switch 54 or a signal generated by the speakerphone key 66. In these cases, the first signal can include a flash signal from the hook switch 54 or a selection of the speakerphone key 66 by the end user.

5 Regardless of its source, the first signal is received by the logic circuit 100. The end user can initiate the first signal, for example, when he/she is placed on hold in the first call, or when he/she is a passive participant in a conference call.

10 As indicated by block 308, a step of uncoupling the second audio input device 24 and the second audio output device 26 from the first telephone line 40 is performed in response to receiving the first signal. Preferably, the logic circuit 100 opens the switch 122
15 to uncouple the second audio input device 24 from the transmit line 104, and opens the switch 126 to uncouple the second audio output device 26 from the receive line 114.

As indicated by block 310, a step of coupling the
20 first audio output device 22 to the first telephone line 40 is performed in response to receiving the first signal. Preferably, the logic circuit 100 closes the switch 112 to couple the first audio output device 22 to the receive line 114 associated with the first
25 telephone line 40.

As indicated by block 312, a step of triggering a second, on-demand telephone line is performed in response to receiving the first signal. Preferably, the on-demand telephone line is provided by the second
30 telephone line 42. It is noted that triggering an on-

demand line is optional since the second telephone line 42 need not be on-demand.

To enable out-dialing to the second telephone line 42, the logic circuit 100 closes the switch 136 to
5 couple the tone generator 134 to the transmit line 110 associated with the second telephone line 42. To inhibit out-dialing to the first telephone line 40, the logic circuit 100 opens the switch 132.

As indicated by block 314, a step of coupling the
10 second audio input device 24 and the second audio output device 26 to the second telephone line 42 is performed in response to receiving the first signal. Preferably, the logic circuit 100 closes the switch 124 to couple the second audio input device 24 to the
15 transmit line 110 associated with the second telephone line 42, and closes the switch 130 to couple the second audio output device 26 to the receive line 120 associated with the second telephone line 42.

As indicated by block 316, a step of providing a
20 dial tone from the second telephone line 42 is performed in response to the first signal. This step can include the logic circuit 100 directing the switch 142 to provide an off-hook condition for the second telephone line 42. As a result, the dial tone is
25 audible by the second audio output device 26.

As indicated by block 320, a step of receiving an out-dial signal is performed. The out-dial signal is received from the end user via the telephone keypad 62, a speed dialing control, or an alternative dialing
30 control. The out-dial signal is communicated to the

second telephone line 42 to initiate a second call to be placed.

As indicated by block 322, a step of providing the second call using the second audio input device 24 and the second audio output device 26 is performed. In this step, audible signals sensed by the second audio input device 24 are communicated to the second telephone line 42. Further, the second audio output device 26 generates audible signals based upon signals received from the second telephone line 42.

As indicated by block 324, a step of monitoring the first call using the first audio output device 22 is performed. The first call can be monitored by the end user while concurrently conducting the second call. The end user may monitor the first call either to: (i) determine when he/she is no longer on hold; (ii) determine when he/she is to contribute in the first call; or (iii) monitor a conversation between other parties in the first call.

As indicated by block 326, a step of receiving a second signal is performed. Preferably, the second signal is based upon either a signal generated by the hook switch 54 or a signal generated by the speakerphone key 66. More preferably, the second signal indicates either a manual depression of the hook switch 54, a replacement of the handset 32 to the handset-receiving portion 60, or a user-selection of the speakerphone key 66.

As indicated by block 330, a step of terminating the second call is performed in response to receiving

the second signal. Preferably, the logic circuit 100 directs the switch 142 to provide an on-hook condition for the second telephone line 42 in this step.

As indicated by block 332, a step of uncoupling
5 the second audio input device 24 and the second audio output device 26 from the second telephone line 42 is performed in response to receiving the second signal. Preferably, the logic circuit 100 opens the switch 124 to uncouple the second audio input device 24 from the
10 transmit line 110, and opens the switch 130 to uncouple the second audio output device 26 from the receive line 120.

If the second signal is received from the hook switch 54, a step of coupling the first audio input
15 device 20 to the first telephone line 40 is performed as indicated by block 334. Preferably, the logic circuit 100 closes the switch 102 to couple the first audio input device 20 to the transmit line 104. Thereafter, the first call is continued using the first
20 audio input device 20 and the first audio output device 22.

If the second signal is received from the speakerphone key 66, steps indicated by blocks 336 and 340 are performed. Block 336 indicates a step of
25 uncoupling the first audio output device 22 from the first telephone line 40. In this step, the logic circuit 100 opens the switch 112 to uncouple the first audio output device 22 from the receive line 114. Block 340 indicates a step of coupling the second audio
30 input device 24 and the second audio output device 26

to the first telephone line 40. In this step, the logic circuit 100 closes the switches 122 and 126. Thereafter, the first call is continued using the second audio input device 24 and the second audio
5 output device 26.

It is noted that the herein-described methods can be directed by a computer-readable storage medium having computer-readable data. The computer-readable storage medium can include either a magnetic storage
10 medium such as a magnetic disk, an electronic storage medium such as a memory, or an optical storage medium such as an optical disk. The logic circuit 100 or a like processor can be responsive to the computer-readable data to perform the herein-described methods.

15 Thus, there has been described herein a concept, as well as several embodiments including preferred embodiments of telephone terminal apparatus and methods.

Because the various embodiments of the present
20 invention allow an in-process, first telephone call to be placed in a passive, monitor mode so that a concurrent second telephone call can be placed, they provide a significant improvement in allowing an end user to manage periods of being either on-hold or a
25 passive participant in the first telephone call. The end user can conduct the second telephone call while concurrently monitoring the first telephone call.

It will be apparent to those skilled in the art that the disclosed invention may be modified in
30 numerous ways and may assume many embodiments other

than the preferred form specifically set out and described above.

Accordingly, it is intended by the appended claims to cover all modifications of the invention which fall
5 within the true spirit and scope of the invention.

What is claimed is:

9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

Claims

1. A method comprising the steps of:
providing a telephone apparatus having a first
5 audio input device, a second audio input device, a
first audio output device, and a second audio output
device;
coupling the first audio input device and the
first audio output device to a first telephone line;
10 receiving a first signal;
modifying the coupling between the first audio
input device and the first telephone line in response
to receiving the first signal; and
coupling the second audio input device and the
15 second audio output device to a second telephone line
in response to receiving the first signal.
2. The method of claim 1 wherein the first
signal is based upon a hook switch signal.
- 20 3. The method of claim 1 wherein the first audio
input device and the first audio output device provide
a hands-free audio interface to the telephone
apparatus.
- 25 4. The method of claim 3 wherein the second
audio input device and the second audio output device
are associated with a handset of the telephone
apparatus.

5. The method of claim 1 wherein the step of modifying the coupling between the first audio input device and the first telephone line includes attenuating the coupling between the first audio input
5 device and the first telephone line.

6. The method of claim 1 wherein the step of modifying the coupling between the first audio input device and the first telephone line includes muting the
10 first audio input device.

7. The method of claim 1 further comprising the steps of:
receiving a second signal; and
15 modifying the coupling between the first audio input device and the first telephone line upon receiving the second signal.

8. The method of claim 7 further comprising the
20 step of uncoupling the second audio input device and the second audio output device from the second telephone line upon receiving the second signal.

9. The method of claim 1 wherein the second
25 telephone line comprises an on-demand line triggered upon receiving the first signal.

10. The method of claim 1 wherein the first signal is received during a first call associated with
30 the first telephone line, the method further comprising

the step of placing a second call using the second telephone line upon receiving the first signal.

11. A telephone apparatus comprising:

5 a first audio input device;
 a second audio input device;
 a first audio output device;
 a second audio output device; and
 a telephone circuit to couple the first audio

10 input device and the first audio output device to a
 first telephone line, the telephone circuit to modify
 the coupling between the first audio input device and
 the first telephone line and to couple the second audio
 input device and the second audio output device to a

15 second telephone line in response to receiving a first
 signal.

12. The telephone apparatus of claim 11 further
comprising a hook switch in communication with the

20 telephone circuit to generate the first signal.

13. The telephone apparatus of claim 11 wherein
the first audio input device and the first audio output
device provide a hands-free audio interface.

25

14. The telephone apparatus of claim 13 wherein
the second audio input device and the second audio
output device are associated with a handset.

30 15. The telephone apparatus of claim 11 wherein

the telephone circuit modifies the coupling between the first audio input device and the first telephone line by attenuating the coupling between the first audio input device and the first telephone line.

5

16. The telephone apparatus of claim 11 wherein the telephone circuit modifies the coupling between the first audio input device and the first telephone line by muting the first audio input device.

10

17. The telephone apparatus of claim 11 wherein the telephone circuit is operative to modify the coupling between the first audio input device and the first telephone line upon receiving a second signal.

15

18. The telephone apparatus of claim 17 wherein the telephone circuit is operative to uncouple the second audio input device and the second audio output device from the second telephone line upon receiving the second signal.

20

19. The telephone apparatus of claim 11 wherein the second telephone line comprises an on-demand line triggered by the telephone circuit upon receiving the first signal.

25

20. The telephone apparatus of claim 11 wherein the first signal is received during a first call associated with the first telephone line, the telephone apparatus further comprising a dialing interface for

30

placing a second call using the second telephone line upon receiving the first signal.

21. An article of manufacture comprising:
- 5 a computer-readable storage medium; and
- computer-readable data stored by the computer-readable storage medium, the computer-readable data to direct a processor to initiate steps of coupling a first audio input device and a first audio output
- 10 device to a first telephone line, modifying the coupling between the first audio input device and the first telephone line in response to receiving a first signal, and coupling a second audio input device and a second audio output device to a second telephone line
- 15 in response to receiving the first signal.

22. A method comprising the steps of:

providing a telephone apparatus having a first audio output device, a second audio output device, and an audio input device;

5 coupling the audio input device and the second audio output device to a first telephone line;

receiving a first signal;

uncoupling the audio input device and the second audio output device from the first telephone line in
10 response to receiving the first signal;

coupling the first audio output device to the first telephone line in response to receiving the first signal; and

coupling the audio input device and the second
15 audio output device to a second telephone line in response to receiving the first signal.

23. The method of claim 22 wherein the first signal is based upon a hook switch signal.

20

24. The method of claim 22 wherein the first audio output device provides a hands-free audio interface to the telephone apparatus.

25 25. The method of claim 24 wherein the audio input device and the second audio output device are associated with a handset of the telephone apparatus.

26. The method of claim 24 wherein the first
30 signal is based upon a signal generated by a

speakerphone control.

27. The method of claim 22 further comprising the steps of:

5 receiving a second signal;

uncoupling the audio input device and the second audio output device from the second telephone line upon receiving the second signal;

uncoupling the first audio output device from the first telephone line upon receiving the second signal; and

recoupling the audio input device and the second audio output device to the first telephone line upon receiving the second signal.

15

28. The method of claim 22 further comprising the steps of:

receiving a second signal;

uncoupling the audio input device and the second audio output device from the second telephone line upon receiving the second signal; and

coupling another audio input device to the first telephone line upon receiving the second signal.

25

29. The method of claim 22 wherein the second telephone line comprises an on-demand line triggered upon receiving the first signal.

30. The method of claim 22 wherein the first signal is received during a first call associated with

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

the first telephone line, the method further comprising the step of placing a second call using the second telephone line upon receiving the first signal.

5 31. A telephone apparatus comprising:

 a first audio output device;

 a second audio output device;

 an audio input device; and

 a telephone circuit to couple the audio input
10 device and the second audio output device to a first
telephone line, the telephone circuit responsive to a
first signal to uncouple the audio input device and
second audio output device from the first telephone
line, to couple the first audio output device to the
15 first telephone line, and to couple the audio input
device and the second audio output device to a second
telephone line.

 32. The telephone apparatus of claim 31 further
20 comprising a hook switch in communication with the
telephone circuit to generate the first signal.

 33. The telephone apparatus of claim 31 wherein
the first audio output device provides a hands-free
25 audio interface.

 34. The telephone apparatus of claim 33 wherein
the audio input device and the second audio output
device are associated with a handset.

35. The telephone apparatus of claim 33 further comprising a speakerphone control in communication with the telephone circuit to generate the first signal.

5 36. The telephone apparatus of claim 31 wherein the telephone circuit is responsive to a second signal to uncouple the audio input device and the second audio output device from the second telephone line, to
10 uncouple the first audio output device from the first telephone line, and to recouple the audio input device and the second audio output device to the first telephone line.

15 37. The telephone apparatus of claim 31 wherein the telephone circuit is responsive to a second signal to uncouple the audio input device and the second audio output device from the second telephone line, and to
20 couple another audio input device to the first telephone line.

25 38. The telephone apparatus of claim 31 wherein the second telephone line comprises an on-demand line triggered upon receiving the first signal.

30 39. The telephone apparatus of claim 31 wherein the first signal is received during a first call associated with the first telephone line, the telephone apparatus further comprising a dialing interface for placing a second call using the second telephone line upon receiving the first signal.

40. An article of manufacture comprising:
a computer-readable storage medium; and
computer-readable data stored by the computer-
- 5 readable storage medium, the computer-readable data to
direct a processor to initiate steps of coupling an
audio input device and an audio output device to a
first telephone line, uncoupling the audio input device
and the audio output device from the first telephone
- 10 line in response to receiving a first signal, coupling
another audio output device to the first telephone line
in response to receiving the first signal, and coupling
the audio input device and the audio output device to a
second telephone line in response to receiving the
- 15 first signal.

41. A telephone apparatus comprising:
- a hands-free audio interface having a first audio input device and a first audio output device;
 - a handset having a second audio input device and a second audio output device;
 - a hook switch;
 - a telephone circuit to couple the first audio input device and the first audio output device to a first telephone line, the telephone circuit responsive to a first signal from the hook switch to modify the coupling between the first audio input device and the first telephone line and to couple the second audio input device and the second audio output device to a second telephone line, wherein the first signal is received during a first call associated with the first telephone line; and
 - a dialing interface for placing a second call using the second telephone line upon receiving the first signal;
 - wherein the telephone circuit is responsive to a second signal from the hook switch to modify the coupling between the first audio input device and the first telephone line and to uncouple the second audio input device and the second audio output device from the second telephone line.

42. A telephone apparatus comprising:

a hands-free audio interface having a first audio input device and a first audio output device;

a handset having a second audio input device and a
5 second audio output device;

a telephone circuit to couple the second audio input device and the second audio output device to a first telephone line, the telephone circuit responsive to a first signal to uncouple the second audio input
10 device and second audio output device from the first telephone line, to couple the first audio output device to the first telephone line, and to couple the audio input device and the second audio output device to a second telephone line, wherein the first signal is
15 received during a first call associated with the first telephone line; and

a dialing interface for placing a second call using the second telephone line upon receiving the first signal;

20 wherein the telephone circuit is responsive to a second signal to uncouple the second audio input device and the second audio output device from the second telephone line, to uncouple the first audio output device from the first telephone line, and to recouple
25 the second audio input device and the second audio output device to the first telephone line.

43. A telephone apparatus comprising:

a hands-free audio interface having a first audio input device and a first audio output device;

a handset having a second audio input device and a
5 second audio output device;

a telephone circuit to couple the second audio input device and the second audio output device to a first telephone line, the telephone circuit responsive to a first signal to uncouple the second audio input
10 device and second audio output device from the first telephone line, to couple the first audio output device to the first telephone line, and to couple the audio input device and the second audio output device to a second telephone line, wherein the first signal is
15 received during a first call associated with the first telephone line; and

a dialing interface for placing a second call using the second telephone line upon receiving the first signal;

20 wherein the telephone circuit is responsive to a second signal to uncouple the second audio input device and the second audio output device from the second telephone line, and to couple the first audio input device to the first telephone line during the first
25 call.

Abstract of the Disclosure

5 A telephone apparatus comprises a first audio
input device, a second audio input device, a first
audio output device, and a second audio output device.
The telephone apparatus is operative to couple the
first audio input device and the first audio output
10 device to a first telephone line. In response to a
first signal, the coupling between the first audio
input device and the first telephone line is modified,
and the second audio input device and the second audio
output device are coupled to a second telephone line.

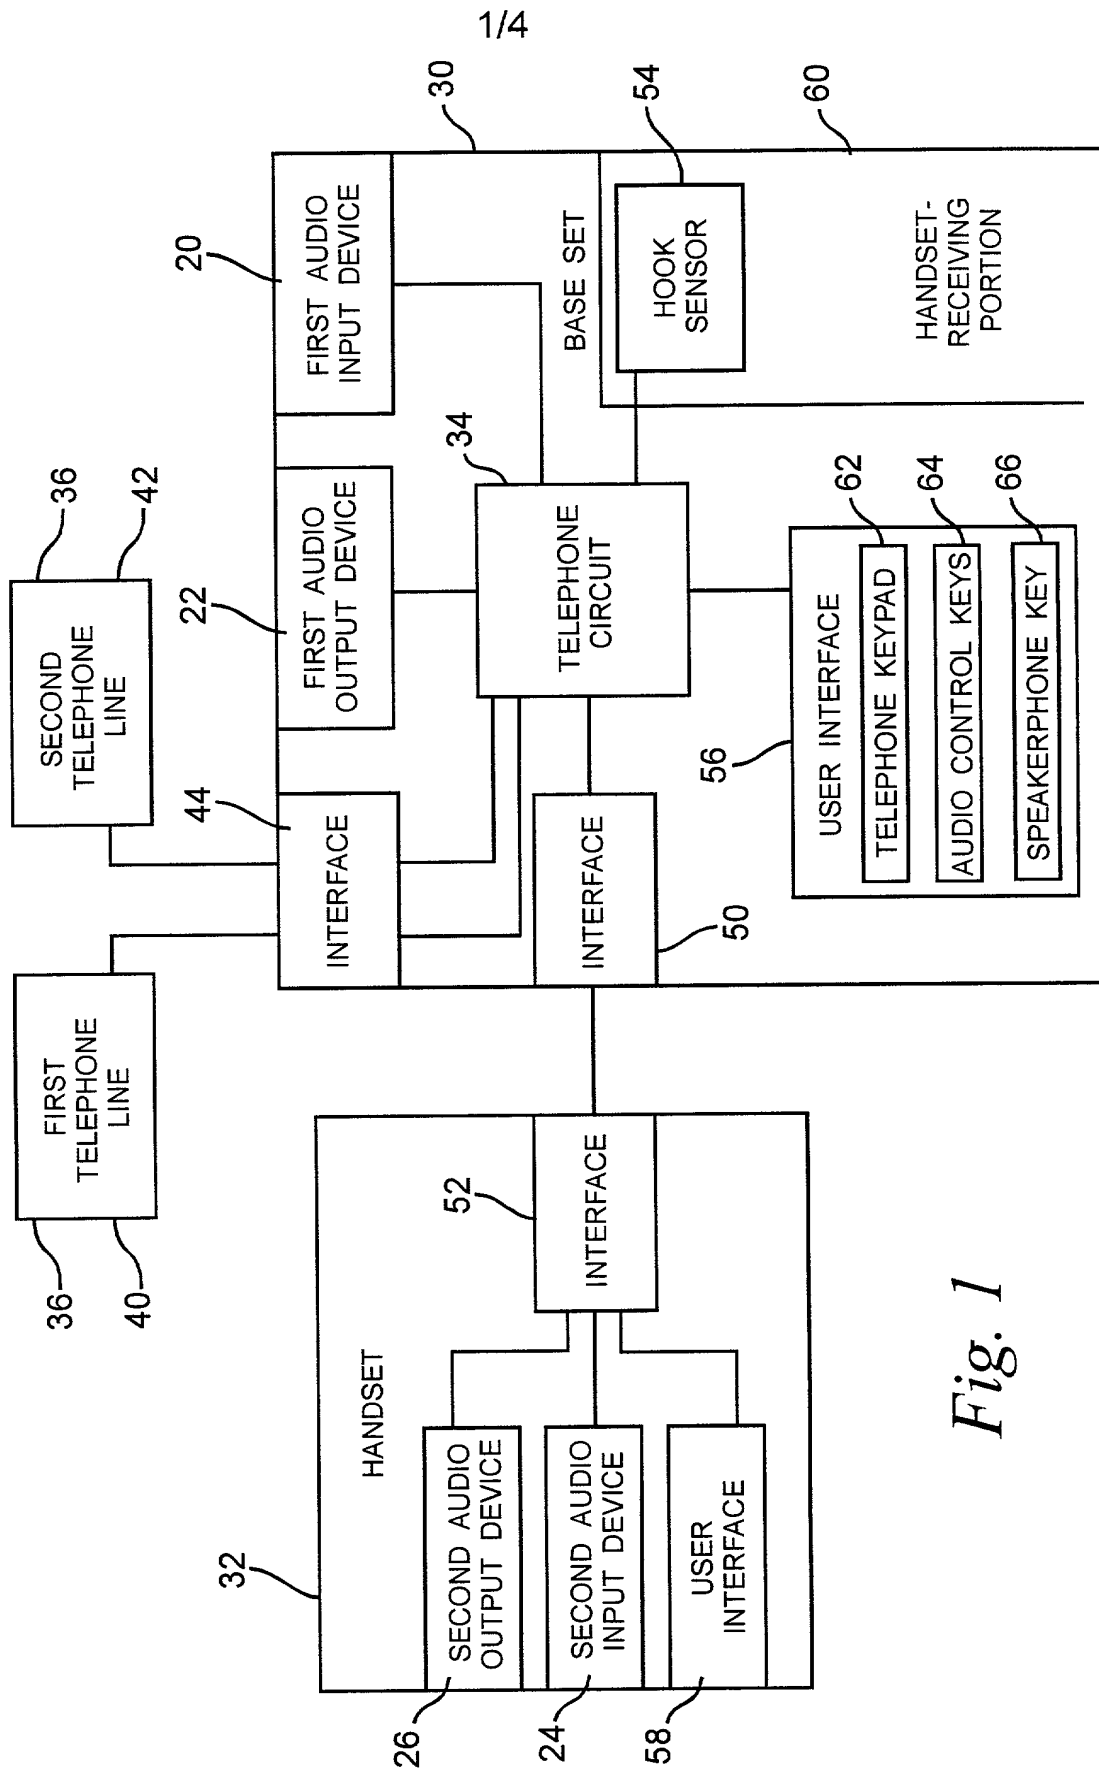


Fig. 1

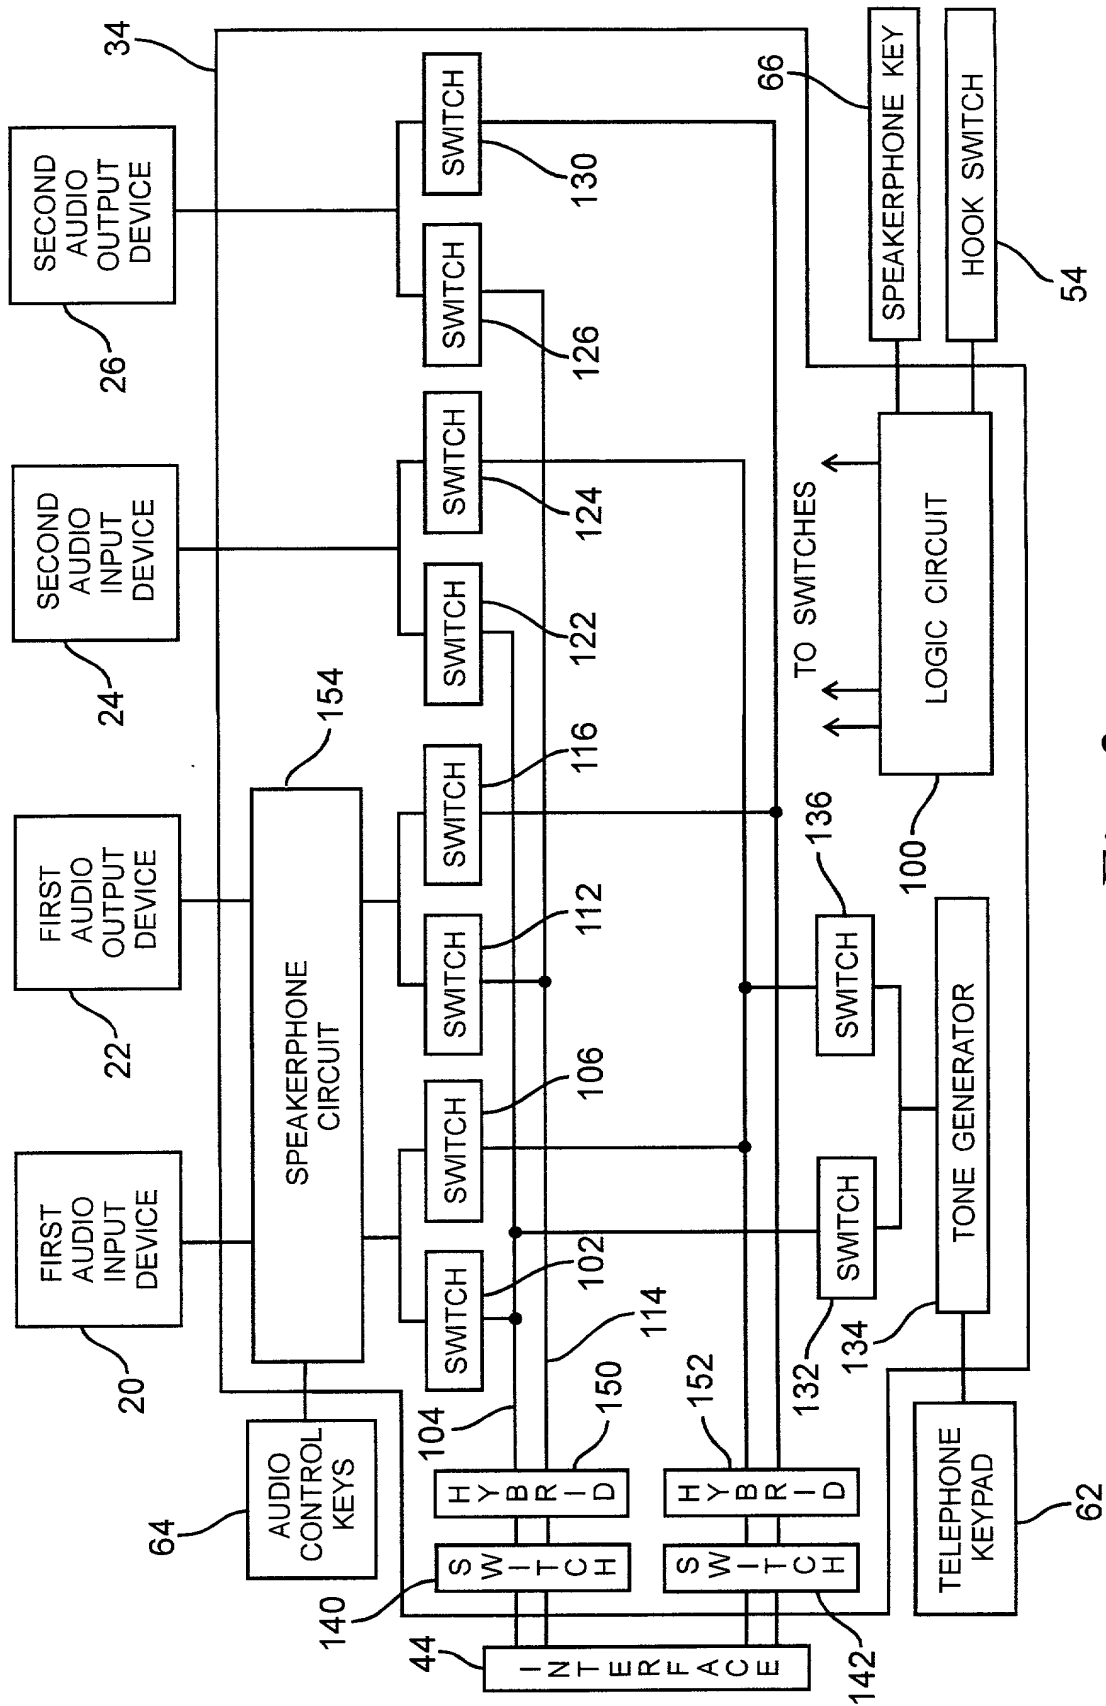


Fig. 2

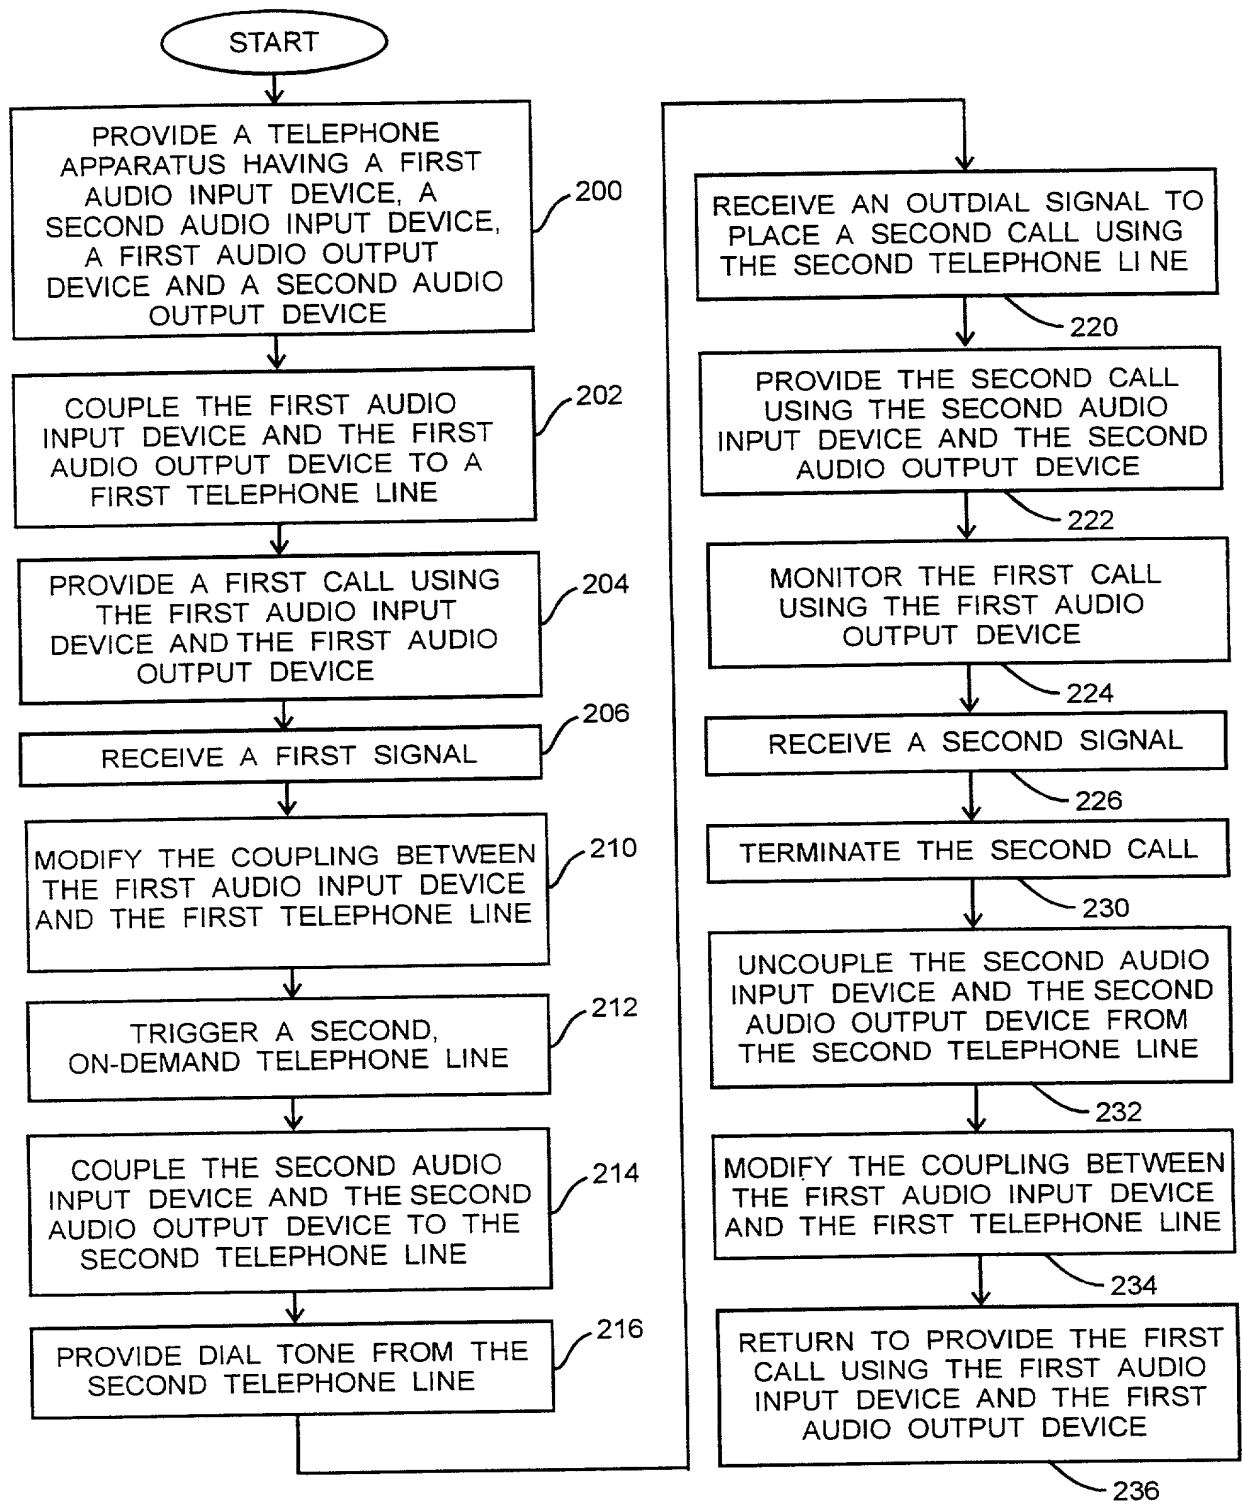


Fig. 3

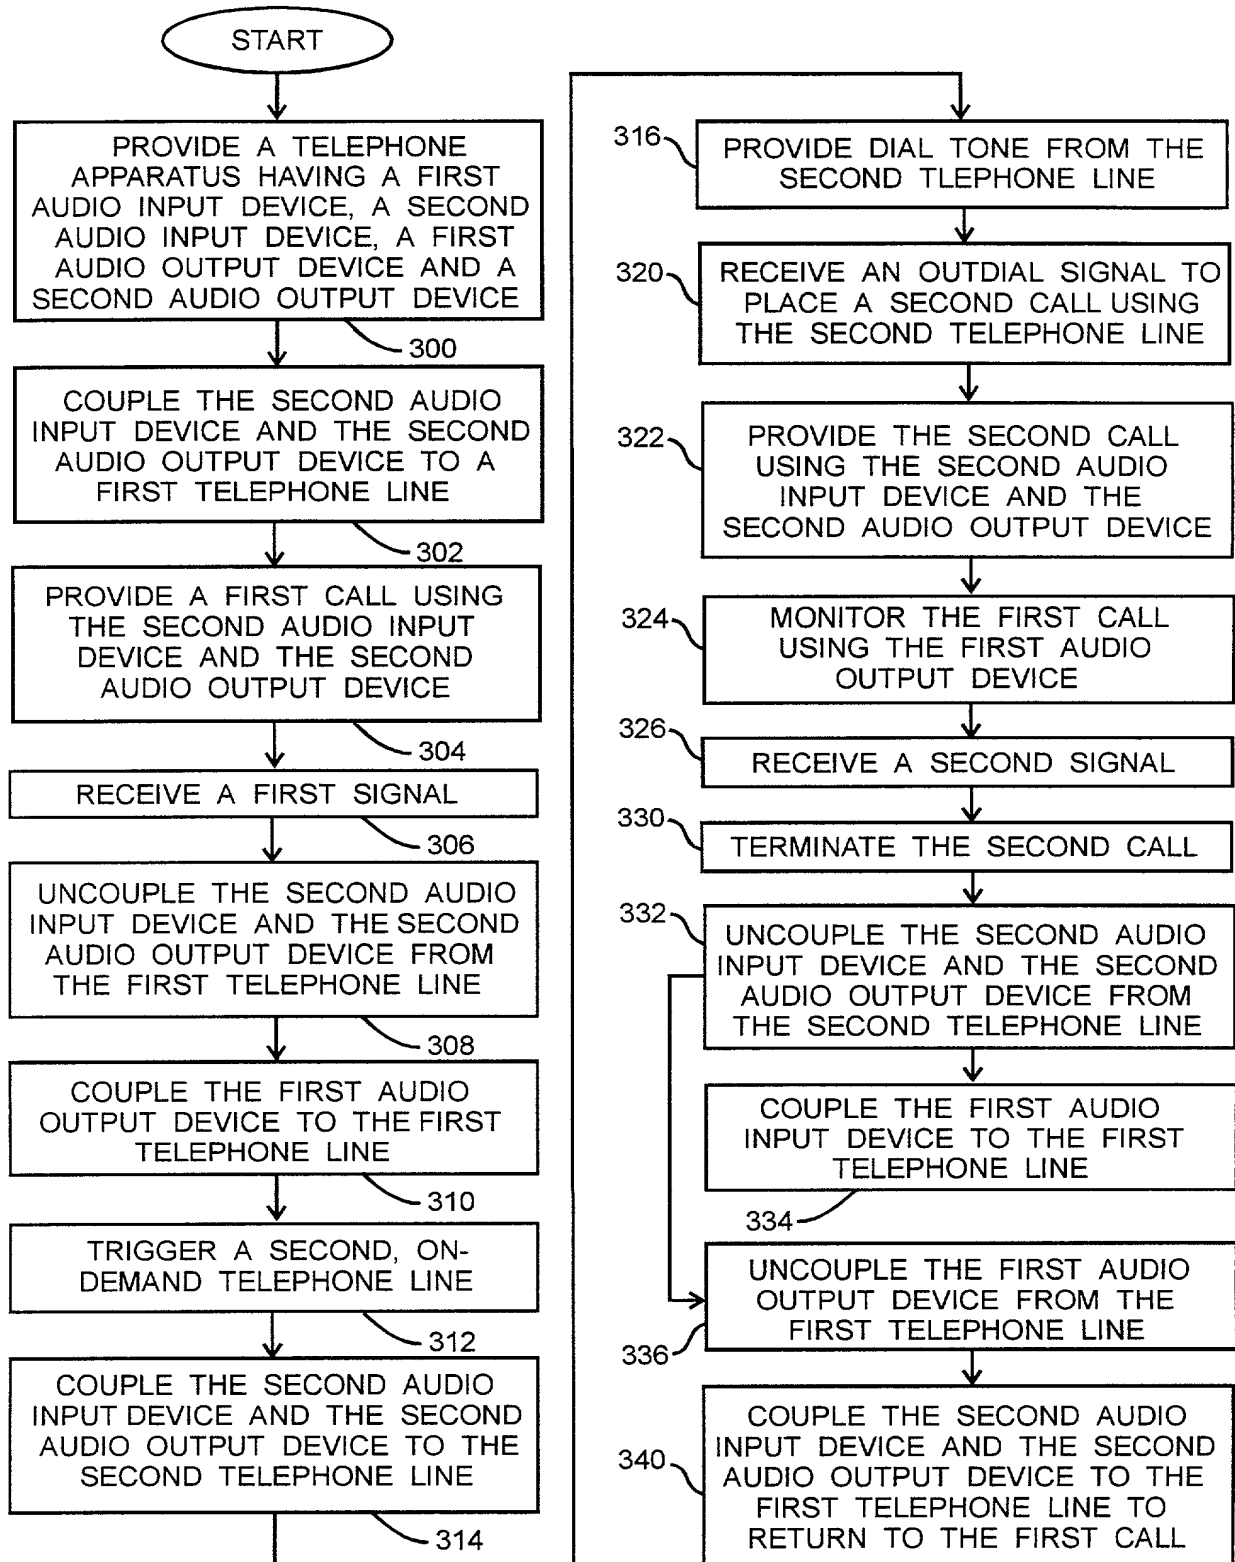


Fig. 4

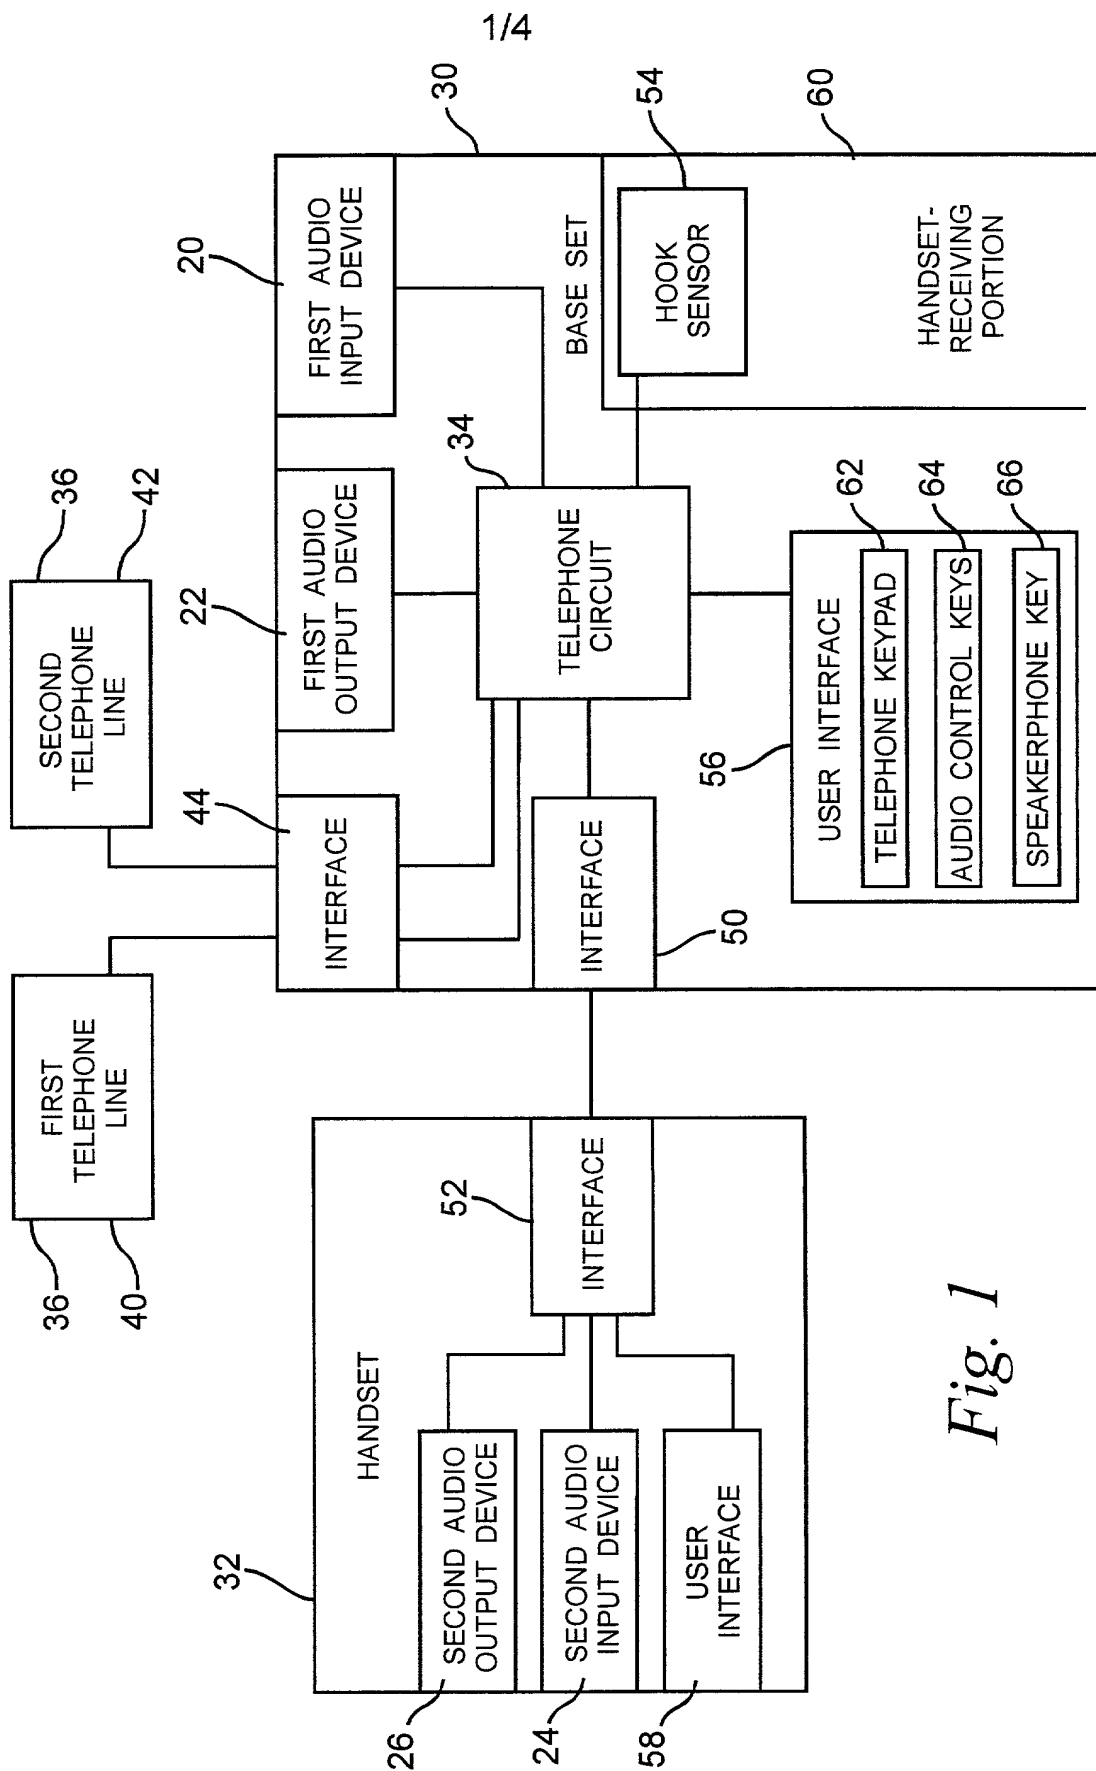


Fig. 1

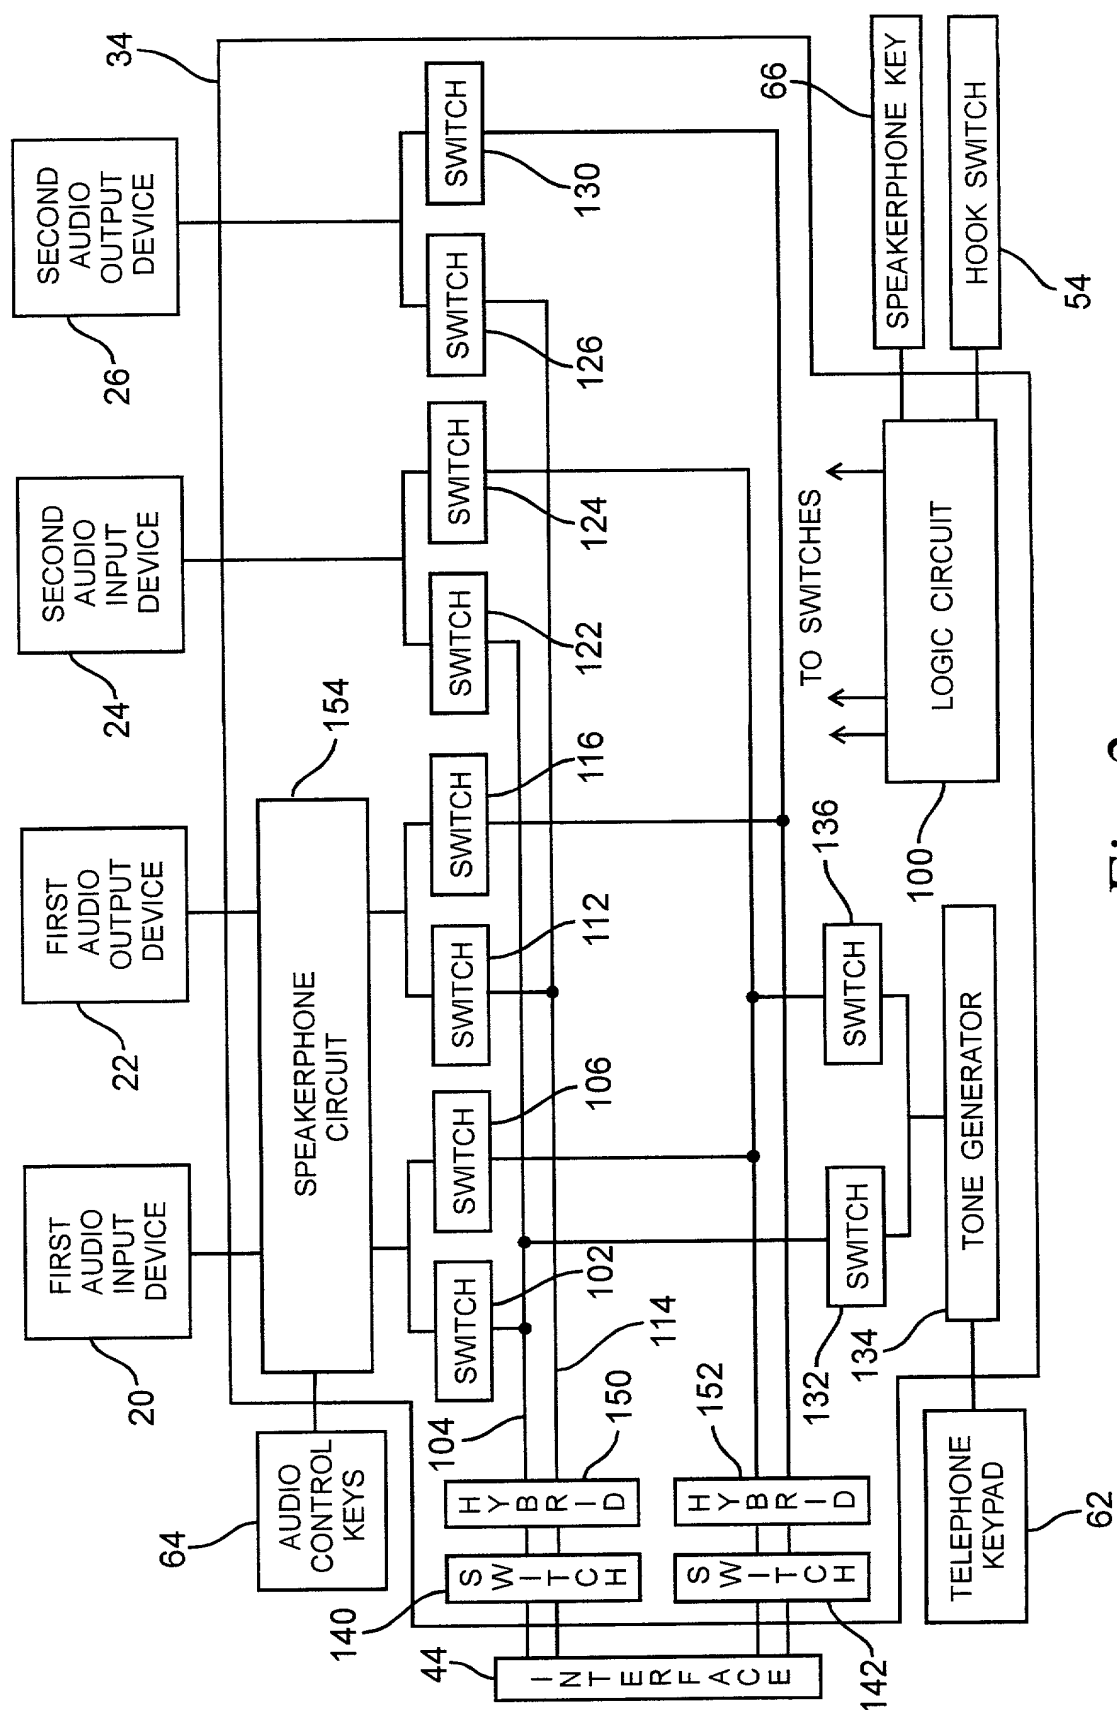


Fig. 2

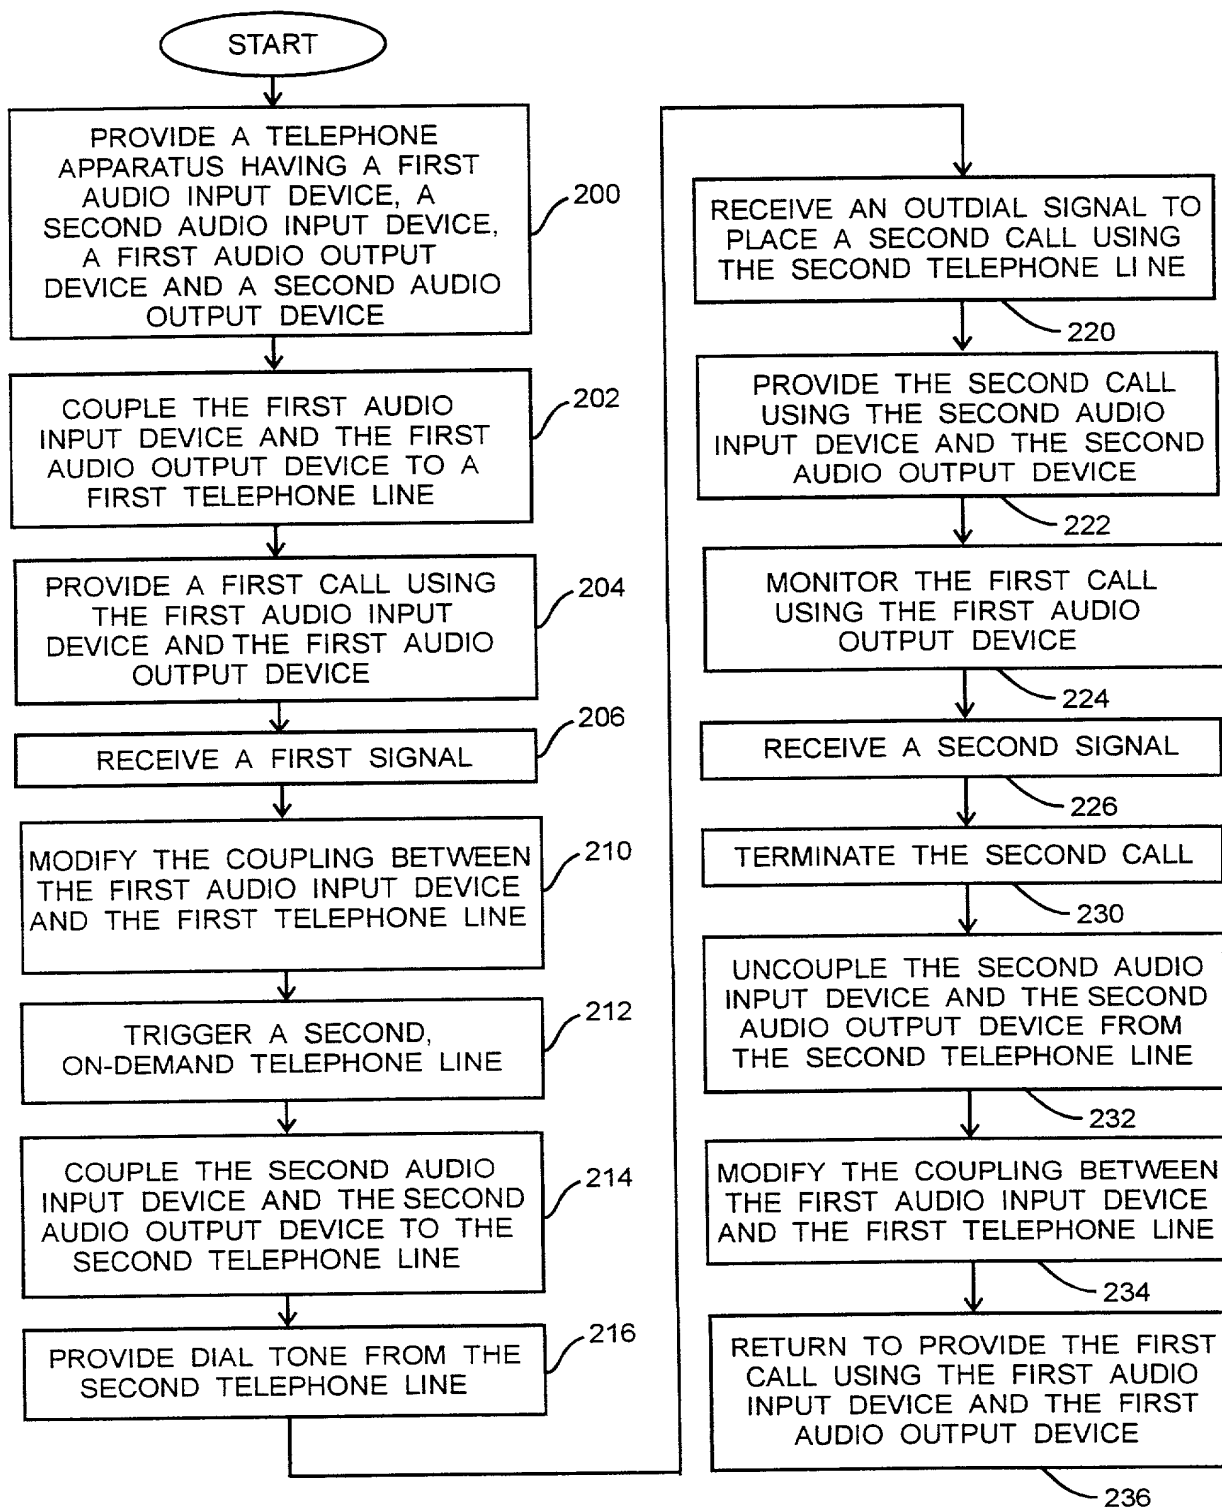


Fig. 3

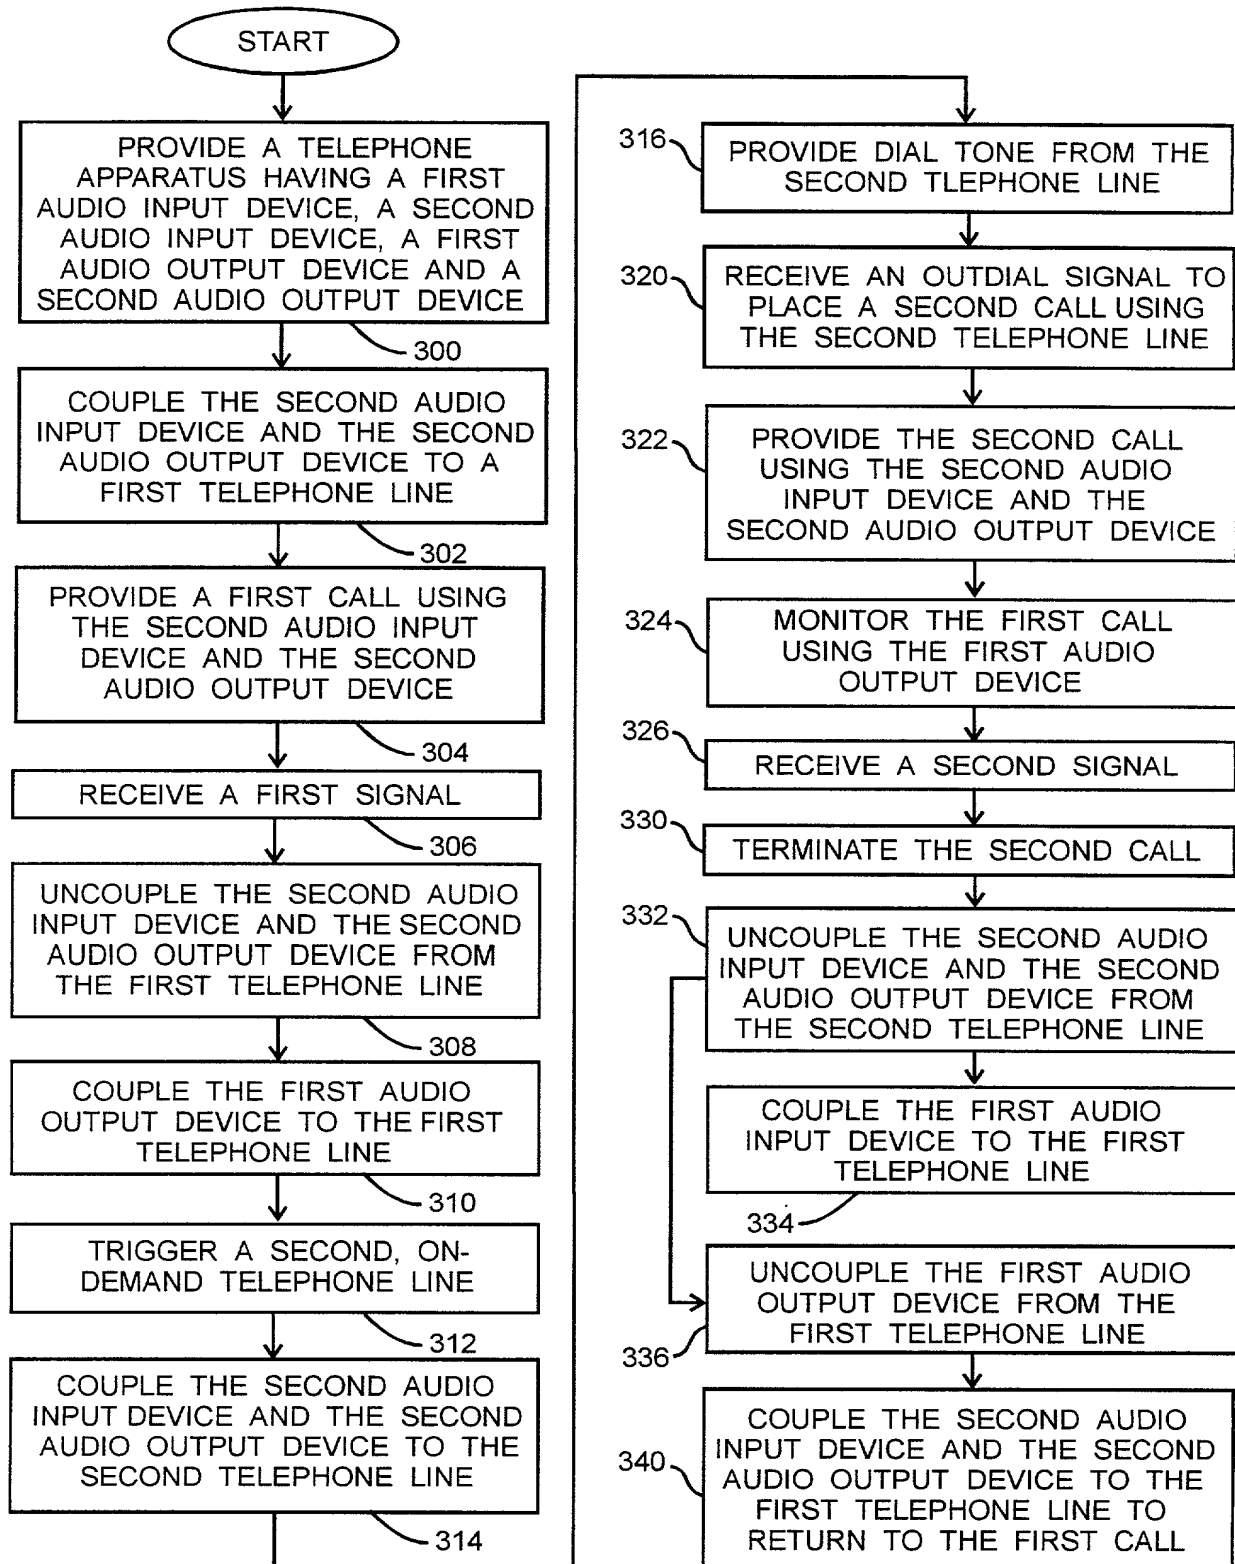


Fig. 4

PATENT APPLICATION DECLARATION COMBINED
WITH POWER OF ATTORNEY

X REGULAR (UTILITY) OR _____ DESIGN APPLICATION
(check one)

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "Telephone Terminal Apparatus and Method", Attorney Docket No. A00404, the specification of which:

_____ is attached hereto.

X was filed on April 17, 1998 as U.S. Application Serial No. 09/062,428
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I hereby authorize my attorney(s) or agent(s) to fill in the U.S. Application Serial No. above, if required.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulation, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

X no such applications filed

_____ such applications identified as follows:

Priority Claimed

_____ (Serial No.)	_____ (Country)	_____ (Day/Month/Year Filed)	<u>Yes</u>	<u>No</u>
_____ (Serial No.)	_____ (Country)	_____ (Day/Month/Year Filed)	<u>Yes</u>	<u>No</u>
_____ (Serial No.)	_____ (Country)	_____ (Day/Month/Year Filed)	<u>Yes</u>	<u>No</u>

I hereby claim the priority benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which is material to the examination of this application and which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s):

(Check
one)☒ no such applications filed☐ such applications identified as follows:

(Application Serial No.)	(Filing Date)	(Status)	(Patented, Pending, Abandoned)
(Application Serial No.)	(Filing Date)	(Status)	(Patented, Pending, Abandoned)
(Application Serial No.)	(Filing Date)	(Status)	(Patented, Pending, Abandoned)

I hereby declare that: as to any claimed subject matter of this application which is common to my earlier United States or foreign application(s), if any, which I have identified above and claimed the benefit of priority thereof, I do not believe that the same was ever known or used in the United States before my invention thereof or patented or described in any printed publication in any country before my invention thereof or more than one year prior to the first of said earlier application(s), or in public use or on sale in the United States more than one year prior to the first of said earlier application(s), and that the common subject matter has not been patented or made the subject of an inventor's certificate before the date of the first of said earlier U.S. application(s) in any country foreign to the United States on an application, filed by me or my legal representatives or assigns more than twelve months (six months if the present application is a Design patent application) prior to the first of said earlier U.S. application(s), if any; an that, as to any claimed subject matter of this application which is not common to said earlier application(s), if any, I do not know and do not believe that the same was ever known or used in the United States before my invention thereof or patented or described in any printed publication in any country before my invention thereof or more than one year prior to the date of this application, or in public use or on sale in the United States more than one year prior to the date of this application, and that said subject matter has not been patented or made the subject of an inventor's certificate in any country foreign to the United States on an application filed by me or my legal representatives or assigns more than twelve months (six months if the present application is a design patent application) prior to the date of this application.

I HEREBY APPOINT THE FOLLOWING AS MY ATTORNEY(S) OR AGENT(S) WITH FULL POWER OF SUBSTITUTION TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH:


<u>NAMES</u>	<u>REG. NO.</u>	<u>NAMES</u>	<u>REG. NO.</u>
Bruce E. Stuckman	36,693	Gustovo Siller, Jr.	32, 305
William A. Webb	28,277	Natalie D. Kadievitch	34,196
Kent E. Genin	37,834	Joseph F. Hetz	41,070


Send Written Correspondence to:

Bruce E. Stuckman
4H80
Ameritech Corporation
2000 W. Ameritech Center Drive
Hoffman Estates, IL 60196-1025

Direct Telephone Calls to: Bruce E. Stuckman at **847/248-8816**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statement and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

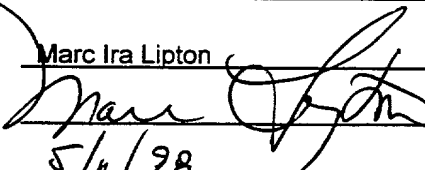Full name of first inventor	<u>Marc Ira Lipton</u>		
Inventor's signature	<u></u>		
Date:	<u>5/11/98</u>		
Residence:	<u>Lincolnshire, Illinois</u>		
	City	State or Foreign Country	
Citizenship	<u>United States of America</u>		
Post Office Address	<u>One Devonshire Lane</u>		
	<u>Lincolnshire, IL 60069</u>		
	City	State or Country	Zip Code

Full name of Second inventor	<u>Robert Derrick Gourdine</u>		
Inventor's signature	<u></u>		
Date:	<u>4/28/98</u>		
Residence:	<u>Naperville, Illinois</u>		
	City	State or Foreign Country	
Citizenship	<u>United States of America</u>		
Post Office Address	<u>607 Wintergreen Circle</u>		
	<u>Naperville, IL 60540</u>		
	City	State or Country	Zip Code